


Vikan - ultra microfibre technology

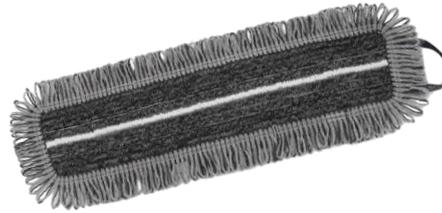

Vikan Damp 47 Dark, Deep Clean mop

| Article | Article no. | Size | Recommended frame or holder |
|--------------|---|------------|---|
| 25 cm | 548529 | 155*335 mm | Vikan composite frame 374118 with exchangeable hooks 375525 |
| 40 cm | 548549 | 155*506 mm | Vikan composite frame 374218 with exchangeable hooks 375540 |
| 60 cm | 548569 | 155*670 mm | Vikan composite frame 374318 with exchangeable hooks 375560 |
| Pocket mop | 548509 | 170*470 mm | Vikan plastic frame 374018 with trigger mechanism |
| Traceability | First 4 numbers describes the construction and the last numbers indicates the model of the product. Batch number indicates when the product is manufactured, referring to this Vikan can trace the production and take action if necessary. | | |
| Packed | 5 pcs. in a plastic bag - 50 pcs. in a carton. | | |

CLEANING

| | | | |
|-------------------|--|----------|--------------------|
| Where to use: | On all types of heavily soiled surfaces, especially tiled surfaces, kitchens, bathrooms and laundries. First and foremost designed for fatty environments as restaurant kitchens and other areas handling food. Avoid any contact with solvents, strong acid or alkaline products. | | |
| How to use: | Preferably used in Vikan® system. A ready-made mop is picked up with the frame - used for 20-40 sqm depending on dirt and hygiene requirements - thereafter released in the laundry bag. Training is organized by Vikan. Contact our sales organization for further information or set up a meeting. | | |
| Optimum moisture: | 175% to achieve best cleaning efficiency and scope | | |
| Preparation: | Use only water, directly in the washing machine with controlled spin-drying process or by using Vikan® preparation lid and box. In case of using cleaning agents we definitely recommend impregnation in lid and box for lowest chemical use. | | |
| Article | Dry prel. weight ± 5 g | ml water | Damp weight ± 15 g |
| 25 cm | 57 | 100 | 157 |
| 40 cm | 84 | 147 | 231 |
| 60 cm | 114 | 200 | 314 |
| Pocket mop | 105 | 184 | 289 |
| Drying speed | The controlled add of damp result in an uniform and quick drying surface. After less than 2 minutes the floor can be used without slippage risk or causing foot prints. | | |

CARE

| | | |
|---|----------------------------|--|
| Care label | | |
| Care label describes the maximum temperature that should be used. Due to cost, time and environmental impact a reduced temperature should always be evaluated depending on the application. | | |
| Recommended washing | 70°C | Use detergents developed for mops and with a pH less than 10. Softner or biocides should not be used as they can cause fiber damage and specific in combination with high temperature. The electrostatic characteristic that is essential for the dust collecting will be reduced or lost with this type of treatment. |
| Washing in specific hygiene use | 72-95°C, depending on time | |
| Drying instruction | Max 55°C | The recommendation is made to avoid the textile to be damaged if humidity is not controlled. |
| Autoclaveable | steam at 121° C - 20 min | Possible to autoclave in steam if required. Other methods must be tested and approved by the originator. |
| Disposal after use | Material recovery | Our textiles are predominant made of synthetics with high strength and can be used in many re-circulated materials depending on their specification. |
| | Energy recovery | The fibers have a high energy value and can be totally burned without anything else than CO ₂ and water. |



Vikan - ultra microfibre technology

COMPOSITION

| | | |
|------------------|--|--|
| Cleaning surface | 90% PES / 7% CV / 3% PA (62% Mikrofiber) 0,3 - 0,9 dtex MF. | Ultra microfiber, microfiber and more coarse fibers in combination provides optimum durability and controlled friction in contact with the floor. The loops collect grease, sand and dirt effectively and reach deep down into the seams of tiles and other structured floors. Fabric is provided with Vikan wicking performance which permanently protect the fibre and increase the transport inside the mop which enhance the cleaning and laundry efficiency. |
| Backing | 100 % PA woven loop + 100 % PES conveyor | Long lasting fabric developed for use in damp and demanding conditions. |

CHARACTERISTICS

| | |
|-----------|---|
| Shrinkage | Less than 5% at recommended washing conditions. |
| Staining | No staining in dry or damp condition if recommendation is followed. Some staining can be noticed on other textiles when the higher temperature range is used but separate washing of mops and cloths that are of different construction or used for different applications are recommended. |


GUARANTEE AND PERFORMANCE

500 times wash and use guarantee in general or hygiene use. Depending on cleaning areas (type of dirt and frequency of cleaning) the guarantee must be limited - but selecting the right mop and care, the life cycle can be optimized to even higher level. Ask our experts for best choice.

| | |
|----------|---|
| Friction | In damp cleaning some friction is expected. Friction coefficient μ is approximately 0,30 measured on a homogeneous plastic floor with recommended damp condition. Less than 0,30 can be interpreted as easy to work on. |
|----------|---|

PRODUCT FEATURES AND BENEFITS

| | |
|---|--|
| Ergonomics | Low friction - light weight - applied tools - no wring - less slip risk |
| Efficiency Effective and simplicity | Flexible and multifunctional use - solving and collecting - no spread out of dirt - fast drying - hygienic Easy handling - no change of water or detergent - all cleaning in one step |
| Environmental impact | No chemicals - high durability - effective utilized resources in manufacturing and use |



Developed and manufactured by the Vikan group for professionals.

